


DYNTEK FibreMesh Tape

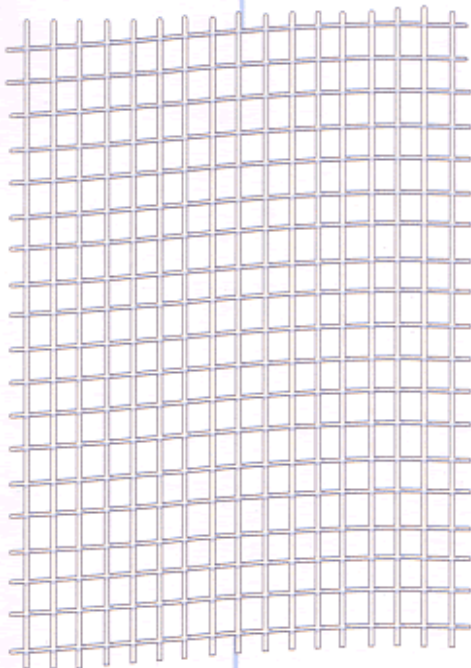

FibreMesh Tape is widely used in drywall and AAC (autoclaved-aerated concrete) blockwork applications such as joints, corners and crack repairs.

Manufactured from fibreglass, woven into mesh size of 3.2mm squares, coated with anti-alkali resin and contact adhesive.

Benefits:

FibreMesh Tape is strong, self-adhesive and convenient to apply. Its use enhances bonding for skim coat plaster and reinforces drywall joint.

Product Code	Width (mm)	Length (m)
FMT50/45	50	45
FMT100/45	100	45
FMT150/45	150	45

Supplied in coiled form

Product Data

• Material		Glass filament
• Model of raw yarn	Warp	33 X 2 tex
	Weft	67 tex
• Weave		Union
• Thickness		0.025mm
• Mesh Spacing		3.2mm X 3.2mm
• Mesh Weight		60g / metre square +/- 5g
• Tensile Strength	Warp	>160N/25mm
	Weft	>180N/25mm

