


DYNTEK Lath - DYNTEK MetalLath

DYNTEK MetalLath is often used as background for plastering in brick/blockwork, partitions and suspended ceilings, as well as in steelwork for fire protection.

DYNTEK MetalLath is manufactured from BS 2989: 1982 conforming pre-galvanised steel into diamond configuration expanded mesh of varying weight options, all complying to BS 1369: Part 1: 1987 specifications for plastering. Stainless steel material to BS 1449: Part 2: 1983 Grade 304S15 material specifications is also available on request.

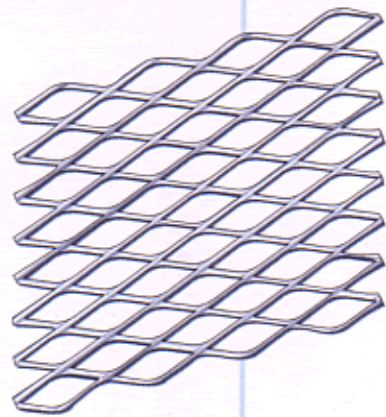

Product Code	Weight (kg/m ²)	Sheet Size		Max. Support Centres (mm)	Packing (pcs/pack)
		Width (mm)	Length (mm)		
ML265	0.91	610	2440	300	10
ML263	1.11			300	
ML264	1.61			350	
ML266	1.84			400	

- Other sheet sizes e.g. 1220 x 2440mm also available upon request.
- To specify stainless steel, add suffix 'S' e.g. ML263S